



URETERAL GUIDE SHEATH

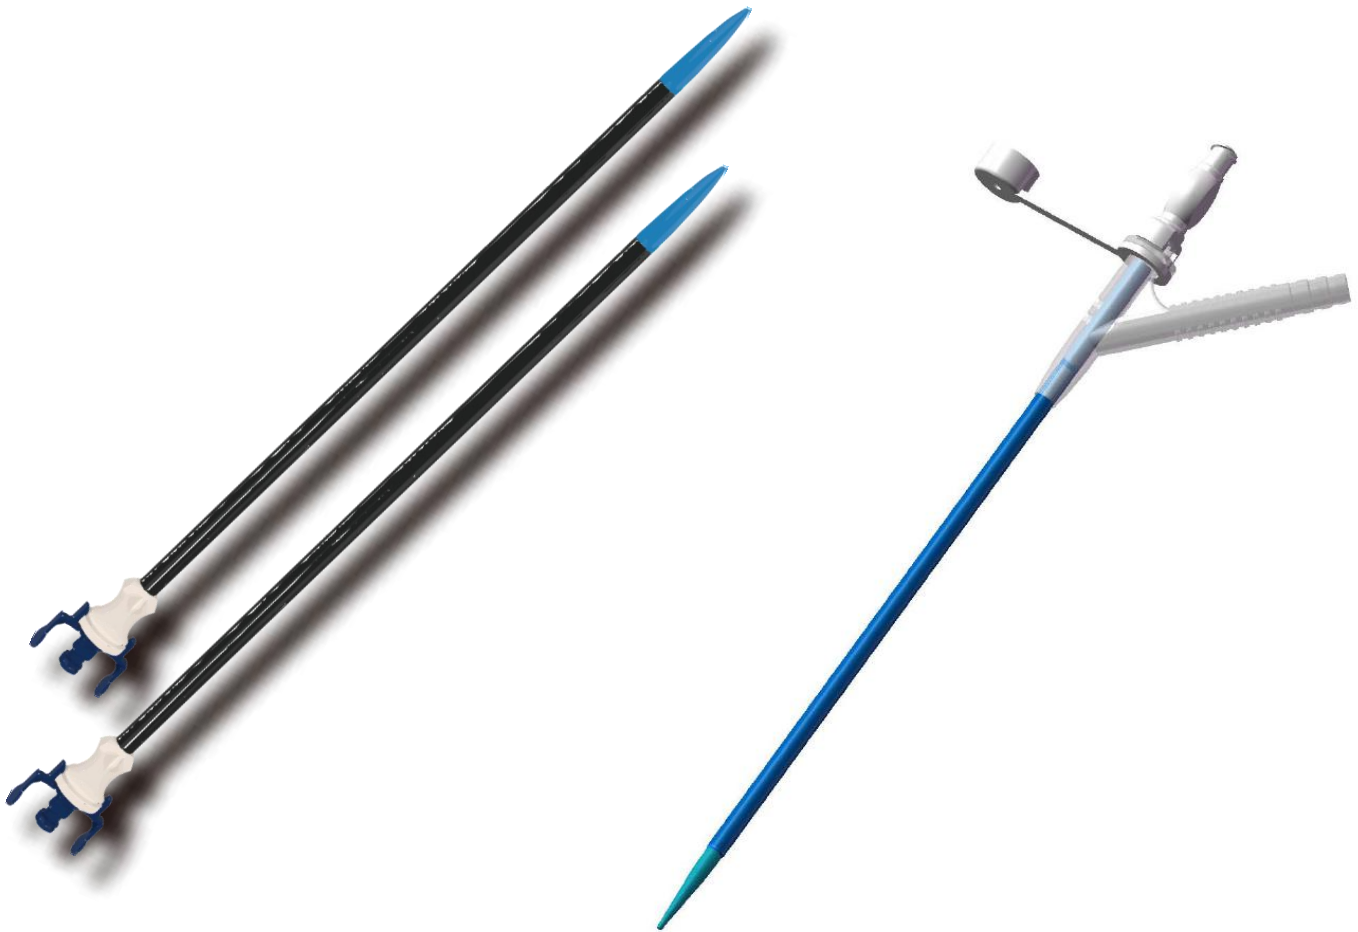

- ✓ PTFE liner facilitates the entry of ureteroscopes and instruments
- ✓ Kink Resistance: Sheath is reinforced with stainless steel coil, designed provide stability and strength during placement
- ✓ Radiopaque stainless coil facilitates placement of the sheath under X-Ray
- ✓ Hydrophilic coated sheath offers lubricity during placement minimizing the risk of trauma


Ureteral guide sheath is intended to provide ureteral dilation and establish a continuous working channel for the introduction of endoscopes and other instruments during endoscopic urological procedures.

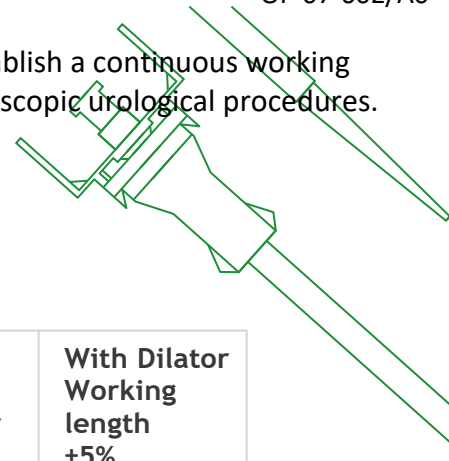

S-Type Specification

Order No.	Size (ID Fr*Length)	Sheath Working length ±5%	Sheath Inner Diameter ±0.15	Sheath Outer Diameter ±0.15	With Dilator Working length ±5%
		(mm)	(mm)	(mm)	(mm)
071026501-1	10Fr*265mm*S	265	3.3	4	315
071036501-1	10Fr*365mm*S	365	3.3	4	415
071041501-1	10Fr*415mm*S	415	3.3	4	465
071046501-1	10Fr*465mm*S	465	3.3	4	515
071056501-1	10Fr*565mm*S	565	3.3	4	615
071226501-1	12Fr*265mm*S	265	4.1	4.7	315
071236501-1	12Fr*365mm*S	365	4.1	4.7	415
071241501-1	12Fr*415mm*S	415	4.1	4.7	465
071246501-1	12Fr*465mm*S	465	4.1	4.7	515
071256501-1	12Fr*565mm*S	565	4.1	4.7	615
071326501-1	13Fr*265mm*S	265	4.35	5	315
071336501-1	13Fr*365mm*S	365	4.35	5	415
071341501-1	13Fr*415mm*S	415	4.35	5	465
071346501-1	13Fr*465mm*S	465	4.35	5	515
071356501-1	13Fr*565mm*S	565	4.35	5	615
071426501-1	14Fr*265mm*S	265	4.7	5.3	315
071436501-1	14Fr*365mm*S	365	4.7	5.3	415
071441501-1	14Fr*415mm*S	415	4.7	5.3	465
071446501-1	14Fr*465mm*S	465	4.7	5.3	515
071456501-1	14Fr*565mm*S	565	4.7	5.3	615


Structure

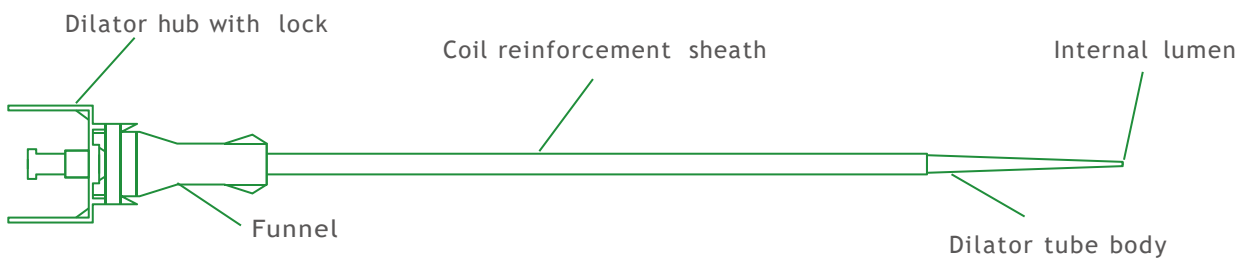

Y-Type Specification

Order No.	Size (ID Fr*Length)	Sheath Working length $\pm 5\%$	Sheath Inner Diameter ± 0.15	Sheath Outer Diameter ± 0.15	With Dilator Working length $\pm 5\%$
		(mm)	(mm)	(mm)	(mm)
071026502-1	10Fr*265mm*Y	265	3.3	4	345
071036502-1	10Fr*365mm*Y	365	3.3	4	445
071041502-1	10Fr*415mm*Y	415	3.3	4	495
071046502-1	10Fr*465mm*Y	465	3.3	4	545
071056502-1	10Fr*565mm*Y	565	3.3	4	645
071226502-1	12Fr*265mm*Y	265	4.1	4.7	345
071236502-1	12Fr*365mm*Y	365	4.1	4.7	445
071241502-1	12Fr*415mm*Y	415	4.1	4.7	495
071246502-1	12Fr*465mm*Y	465	4.1	4.7	545
071256502-1	12Fr*565mm*Y	565	4.1	4.7	645
071326502-1	13Fr*265mm*Y	265	4.35	5	345
071336502-1	13Fr*365mm*Y	365	4.35	5	445
071341502-1	13Fr*415mm*Y	415	4.35	5	495
071346502-1	13Fr*465mm*Y	465	4.35	5	545
071356502-1	13Fr*565mm*Y	565	4.35	5	645
071426502-1	14Fr*265mm*Y	265	4.7	5.3	345
071436502-1	14Fr*365mm*Y	365	4.7	5.3	445
071441502-1	14Fr*415mm*Y	415	4.7	5.3	495
071446502-1	14Fr*465mm*Y	465	4.7	5.3	545
071456502-1	14Fr*565mm*Y	565	4.7	5.3	645

Structure

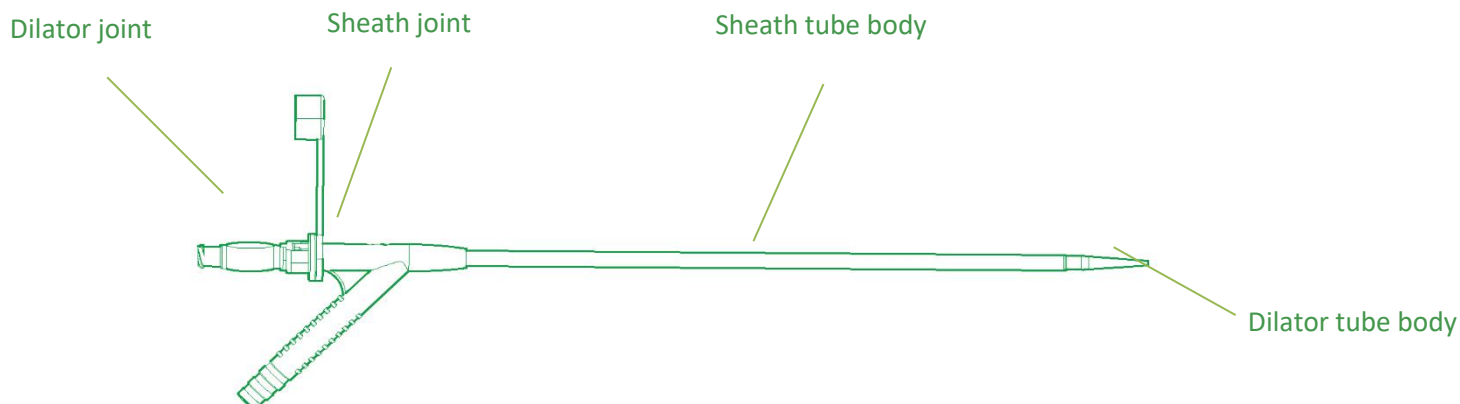

Princeton Medical Scientific Co., Ltd

RM503, Building C, No.8 Fukang West Street, Yushu Industrial Park,
Guangzhou Science City, Huangpu District, Guangzhou, 510663, China
Tel: +86 20 82112462
Email: pulin@pulinmed.com
www.pulinmed.com